
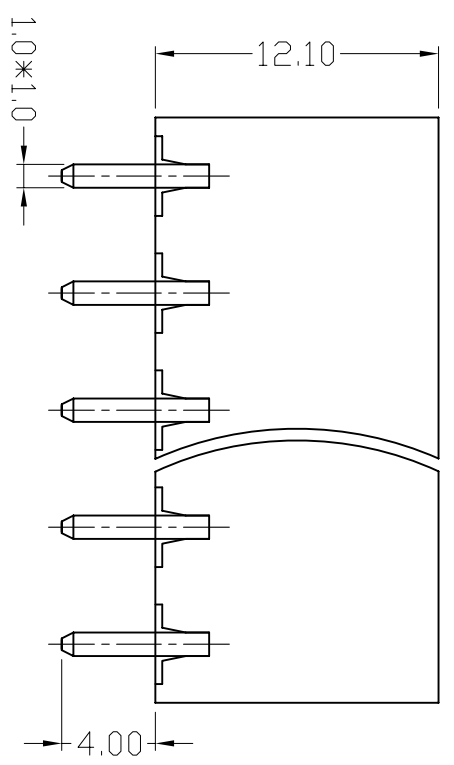
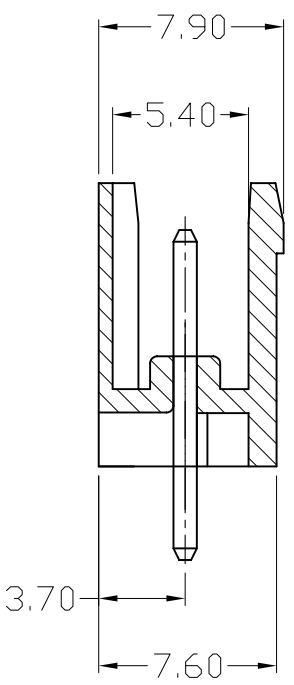


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A				

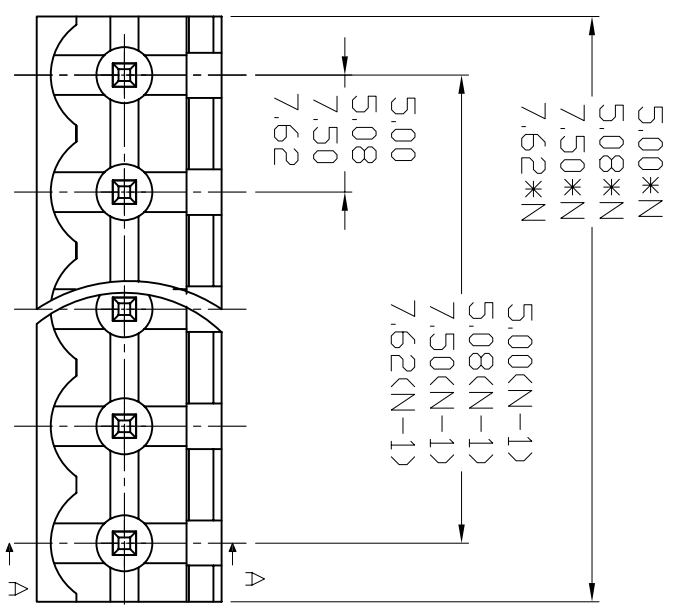

- MATERIAL
PIN HEADER : BRASS, TIN PLATED
HOUSING : PA66, UL94V-0
- ELECTRICAL
RATED VOLTAGE : 300V
RATED CURRENT : 15A
CONTACT RESISTANCE : 20mΩ
INSULATION RESISTANCE : 5000MΩ/1000V
WITHSTANDING VOLTAGE : AC1500V/1Min
- MECHANICAL
TEMP. RANGE : -40°C~+105°C
MAX SOLDERING : +250°C, FOR 5 SEC.

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.20	X.	±2°
.X	±0.15	.X	±1°
.XX	±0.10	.XX	±0.5°
DRAWING TYPE		COMPONENTS	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION	UNITS	TITLE
1st Angle	mm	Pruggalbe Terminal
SHEET SIZE	A4	Blocks5.00/5.08/7.50/7.62mm
SERIES	KF2EDGV	SERIES

KF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CO.,LTD