



CSM-S11F1

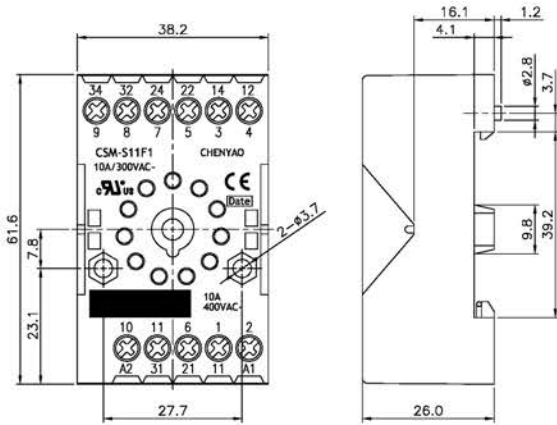


UL/CUL No: E306487

Dimensions



Accessories

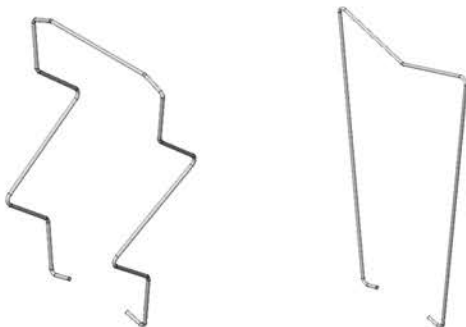

Main Feature

- Snap-on mounting on DIN-rail.
- Screw mounting.
- Pozidrive screw with rising clamp terminals.
- Logical layout of input-/output connection.
- Metal clip with ejection function for relays of 50mm height.
- White marking area.
- DIN-rail sockets and accessories: RoHS compliance (Directive 2002/95/EC).
- Socket with screw-type terminal for DIN-rail mounting.

Specifications

Rated current.....12A
 Rated voltage / max. Switching voltage AC..150/300VAC
 Dielectric strength coil-contact circuit.....2,500V_{rms}
 Clearance / creepage coil-contact circuit.....≥ 2.8/4mm
 Material group of insulation parts.....≥ IIIa
Insulation to IEC 60664-1
 Type of insulation coil-contact circuit.....basic
 Open contact circuit.....functional
 Rated insulation voltage.....250V
 Pollution degree.....2
 Rated voltage system.....230/400V
 Over voltage category.....III
RoHS Directive 2002/95/EC
 Sockets, retainers and marking tag:.....compliant
 Degree of protection DIN 40050.....IP20
 Ambient temperature range.....-25... +70°C
 Terminals.....screw
 Terminal screw torque acc. IEC 61984.....0.5Nm
 Max.....0.7Nm
Wire cross section
 Single wire.....2X2.5mm²
 Fine wire.....2x2.5mm²
 With bootlace crimp (DIN 46228/1).....2x1.5mm²
 Insertion cycles.....A (10)
 Max. Insertion Force total.....100N
 Mounting distance.....0, dense packing
 Weight.....56g
 Packaging unit.....20 pcs.

Order Information

CSM - S 11 F1 - □

Special remark	Nil (for standard) L (for LED module) H (for high insulation) R (for level function different)
Insulation levels	F1 (for one level)
Relay terminals	08 (for 08 terminals relay) 11 (for 11 terminals relay)
Contact form	S (for screw type)
Item	CSM