


REV	DESCRIPTION	DESIGN	DATE
AO	NEW DRAWING	EDDIE	2022.03.31

Raw Material	PA66、COPPER ALLOY、SILICONE
CERTIFICATION	CQC/UL/TUV/RoHS/CE
Flame-resistant rating	UL94 V-2
Level of protection	IP68
Voltage rating/Current rating	450V / 16A
Withstanding voltage	2500V
Cable gague	0.5mm ² ~ 2.5mm ²
Operating temperature	-40°C ~ +105°C









3 Pin




Part Number	Rubbers Diameter	Outer Cable Diameter
EW-P20-03301BB11	ø 11.5mm	ø 9-12mm
EW-P20-03301BB8	ø 8.5mm	ø 5-9mm

Rubbers Diameter

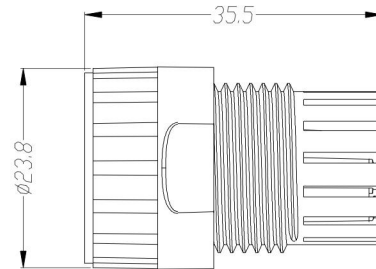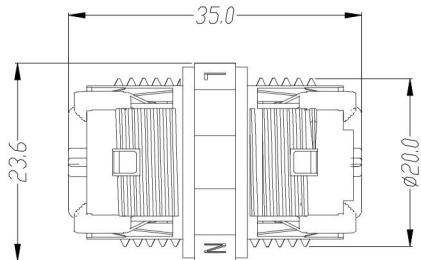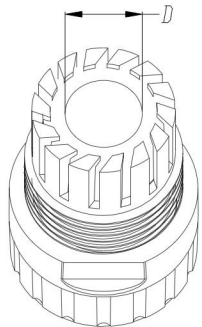

Weight	MEAS	Each carton number	G. W.
26.2g	42x30x34cm	600 pcs	16.6kg

TOLERANCE UNSPECIFIED		
X. ±0.35	X.XX ±0.10	X.° ±3°
X.X ±0.20	X.XXX ±0.05	X.X° ±2°
		X.XX° ±1°



UNIT	mm	DRAW	EDDIE / 2022.03.31	PART NO	EW-P20-03301BB#
SCALE	1:1	CHKD		DWG NO	EW-P20-03301BB#
SHEET	1/1	APPD		TITLE	EW-P20-3P_WATERPROOF_CONNECTOR

